



MACH. GROOVE IN LID SEAT FOR OIL RESISTANT T-GASKET, NITRILE, (60 DURO)

T-SEAL/CONCEALED PICKHOLE DETAIL
GASKETED LIDS USED FOR SANITARY AND WATER MANHOLES

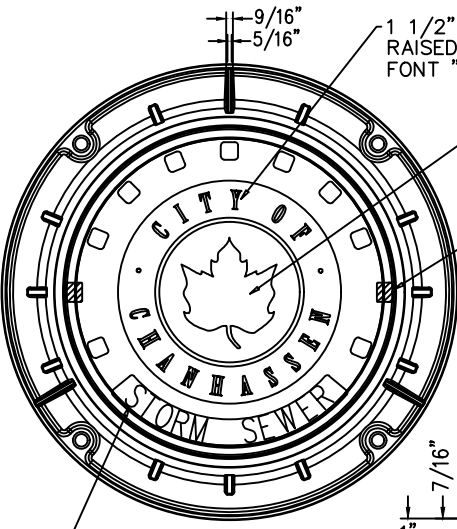

COMPONENT NUMBERS:

ALL FRAMES ARE:
1642

CHANHASSEN LOGO LID NUMBERS:
5631 - SANITARY MANHOLES
5634 - STORM MANHOLES
5640 - WATER MANHOLES

NOTE:

1. BOLTS NOT REQUIRED UNLESS CALLED OUT IN SPECIAL CONDITIONS.
2. DIMENSIONS ARE IN ENGLISH MEASUREMENTS
3. CASTINGS MEET HS-25 REQUIREMENTS
4. MANUFACTURED IN USA
5. QUALIFIES FOR LEED CREDITS

MATERIALS:

6. LID - CAST GRAY IRON, ASTM A-48 CLASS 35B
7. FRAME - CAST GRAY IRON, ASTM-A-49 CLASS 40A
8. FINISH - BARE METAL NO PAINT OR COATINGS
9. WEIGHTS: FRAME 126 LBS / LID 122 LBS



**CITY OF
CHANHASSEN**

MANHOLE CASTINGS
AND LIDS DETAIL

REVISED: 3-16

FILE NAME: G:\ENG\SPCS\2111

ENGINEERING DEPARTMENT

PLATE NO.:

2111